


Support Frame (Option)
Jet Clone can be mounted to convey regrind material.

MB Material Loader (Option)
Pumping-type by compressor air.

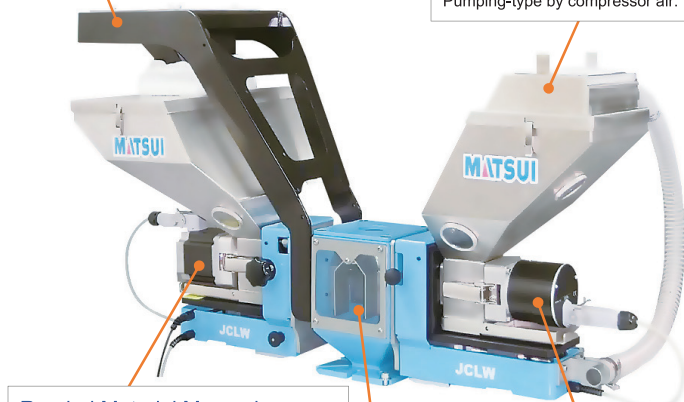


Regrind Material Measuring
Measure regrind material by the combination of screw feeder and high torque motor.

MB Material Measuring
Measure MB material by the combination of screw feeder and low torque motor.

Neck Piece (Option)
Water cooling type Neck Piece for high temperature material (~120°C).

Gravimetric Loss in Weight Feeder, Saving Masterbatch

Color Panel *Interactive Controller*

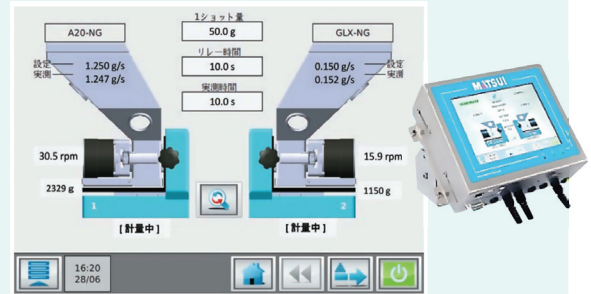

Networking
Real time quality control by LAN communication

Mode Selection
Applicable for both injection molding machine and extrusion machine.

• **Accurate blending.**





Resin and color flow together at the same, Inline dosing and Dosing cylinder®.

• **Reducing Masterbatch.**

No over dosing, Continuous and accurate dosing.

• **No separation due to conveying.**

Saving space, Compact and Lightweight. No separation, Mounted directly on the machine.

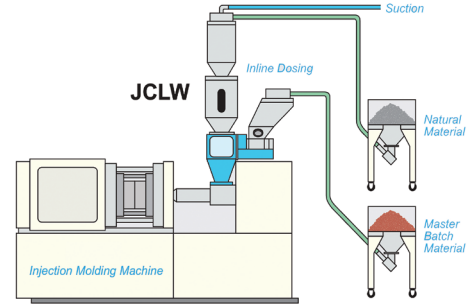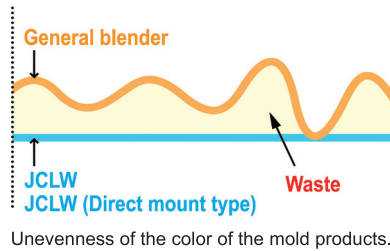

Standard Specification

Model		JCLW-2-1S	JCLW-3-2S
Power Supply	Voltage	AC95~250V 50/60Hz 1Phase	
Power Consumption ①		80W	150W
Power Cable		Cable length : 2m	
Operation		8 inches color touch panel	
Input Signal		Potential free-, 24VDC- Extruder tachometer (0-30VDC) start input	
Output Signal		Error and warning, solenoid valve for automatic hopper loader	
Measuring Capacity ②		0.07~180kg/h	
Neck Piece Model ③		NST40 (Max loading weight - 100kg)	
Communication		TCP/IP, Modbus and CANbus	
Data Storage ④		Internal memory	
Applicable Material ⑤	Virgin Material	Material not bridged on the hopper of this equipment Material not varying in grain shape and size Pellet : φ2.5<3mm, L<3mm	
	MB Material	Pellet : φ2.5mm, L<3mm or Granules	
	Regrind Material	Materials that do not bridge the safety mesh (40x40mm openings) excluding miscuts with an apparent specific gravity of 0.3 to 0.5.	

① Virgin material is natural fall, and combination of one MB material metering unit. (JCLW-2-1S)

② Virgin material is natural fall, and combination of MB material metering unit and regrind material metering unit. (JCLW-3-2S)

③ Measured with normal granular masterbatch apparent specific gravity of 0.8. It changes depending on the type of feeder and material.

④ Selection of NST90 model (Max loading weight -200kg), and the water cooling type Neck piece for high temperature materials (~120°C).

⑤ There is option software MCLAN2. Possible data logging of multiple devices and various settings backup.

⑥ We can not cope other than Applicable materials listing.

Options

- Auto feeder (MB/regrind) • High temp kit • Cooling unit • Alarm indicator (with buzzer) • Support frame • Various screws • Slide gate

Dryer

Mold Dehumidifier

Conveyor

Temperature Controller

Blender

Granulator

System & Others