


High performance granulator

A variety of Receptacle Type

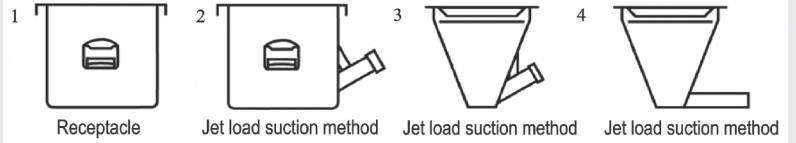

Standard Specification

Model	Unit	SMG-030	SMG-050	
Power supply	Voltage	AC200/380V, 50Hz, 3 Phase		
	Apparent Power	kVA	3.18	5.2
	Breaker Capacity	A	20/10	30/20
	Rated Current	A	9.5/5.0	16.7/8.8
Motor	Output	kW	2.2	4
Rotating Speed		rpm	472	475
Rotary Cutter Amount			3	6
Stationary Cutter			2	
Screen Size	mm	Ø 8		
Outer Dimensions	W	mm	495	813
	D	mm	758	898
	H	mm	1,171	1,481
Product Weight	kg	281	507	


Options

- Runner chute • Hopper lid • Magnet slide • Pilot lamp • Level guage



SMG-030

Cutter *Crossed structure disperses impulse load.*

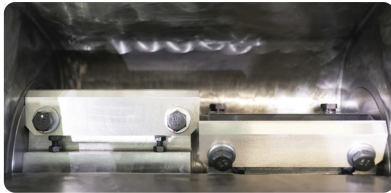

Dryer

Mold Dehumidifier

Conveyor



Aero Remover

ARV



Less powder, better quality!

Simply install it in an existing line to efficiently remove powder adhering to pellets during transport. Easy filter maintenance with tool-free disassembly and cleaning. Unique airflow control provides up to 150% better dust removal performance compared to conventional models.

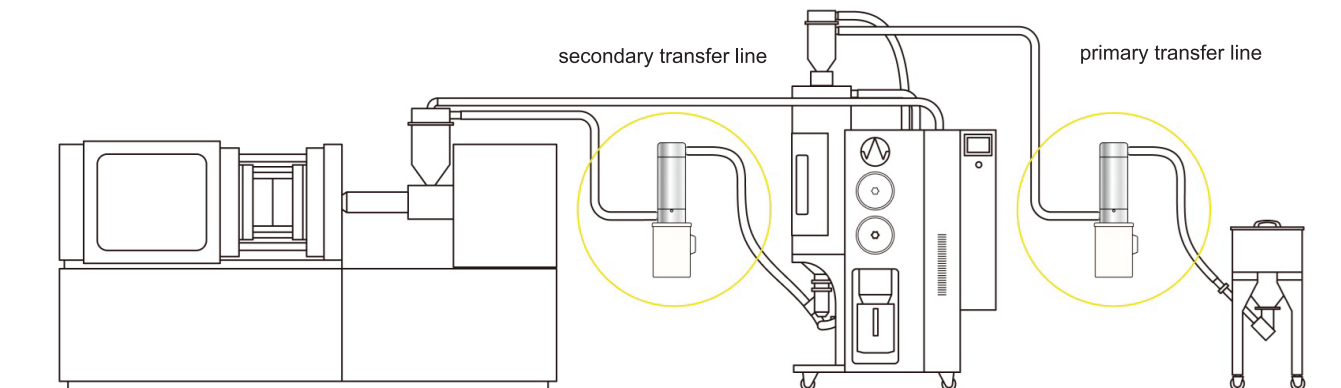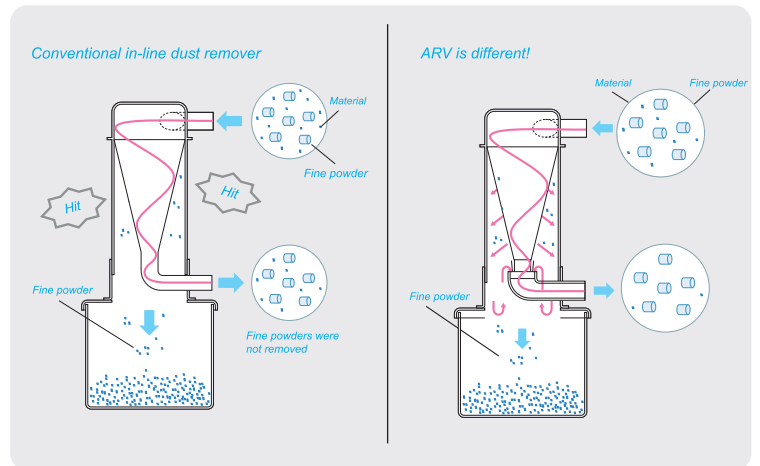

Temperature Controller

Blender

Granulator

System & Others